


# RS232 cable, about 100cm long

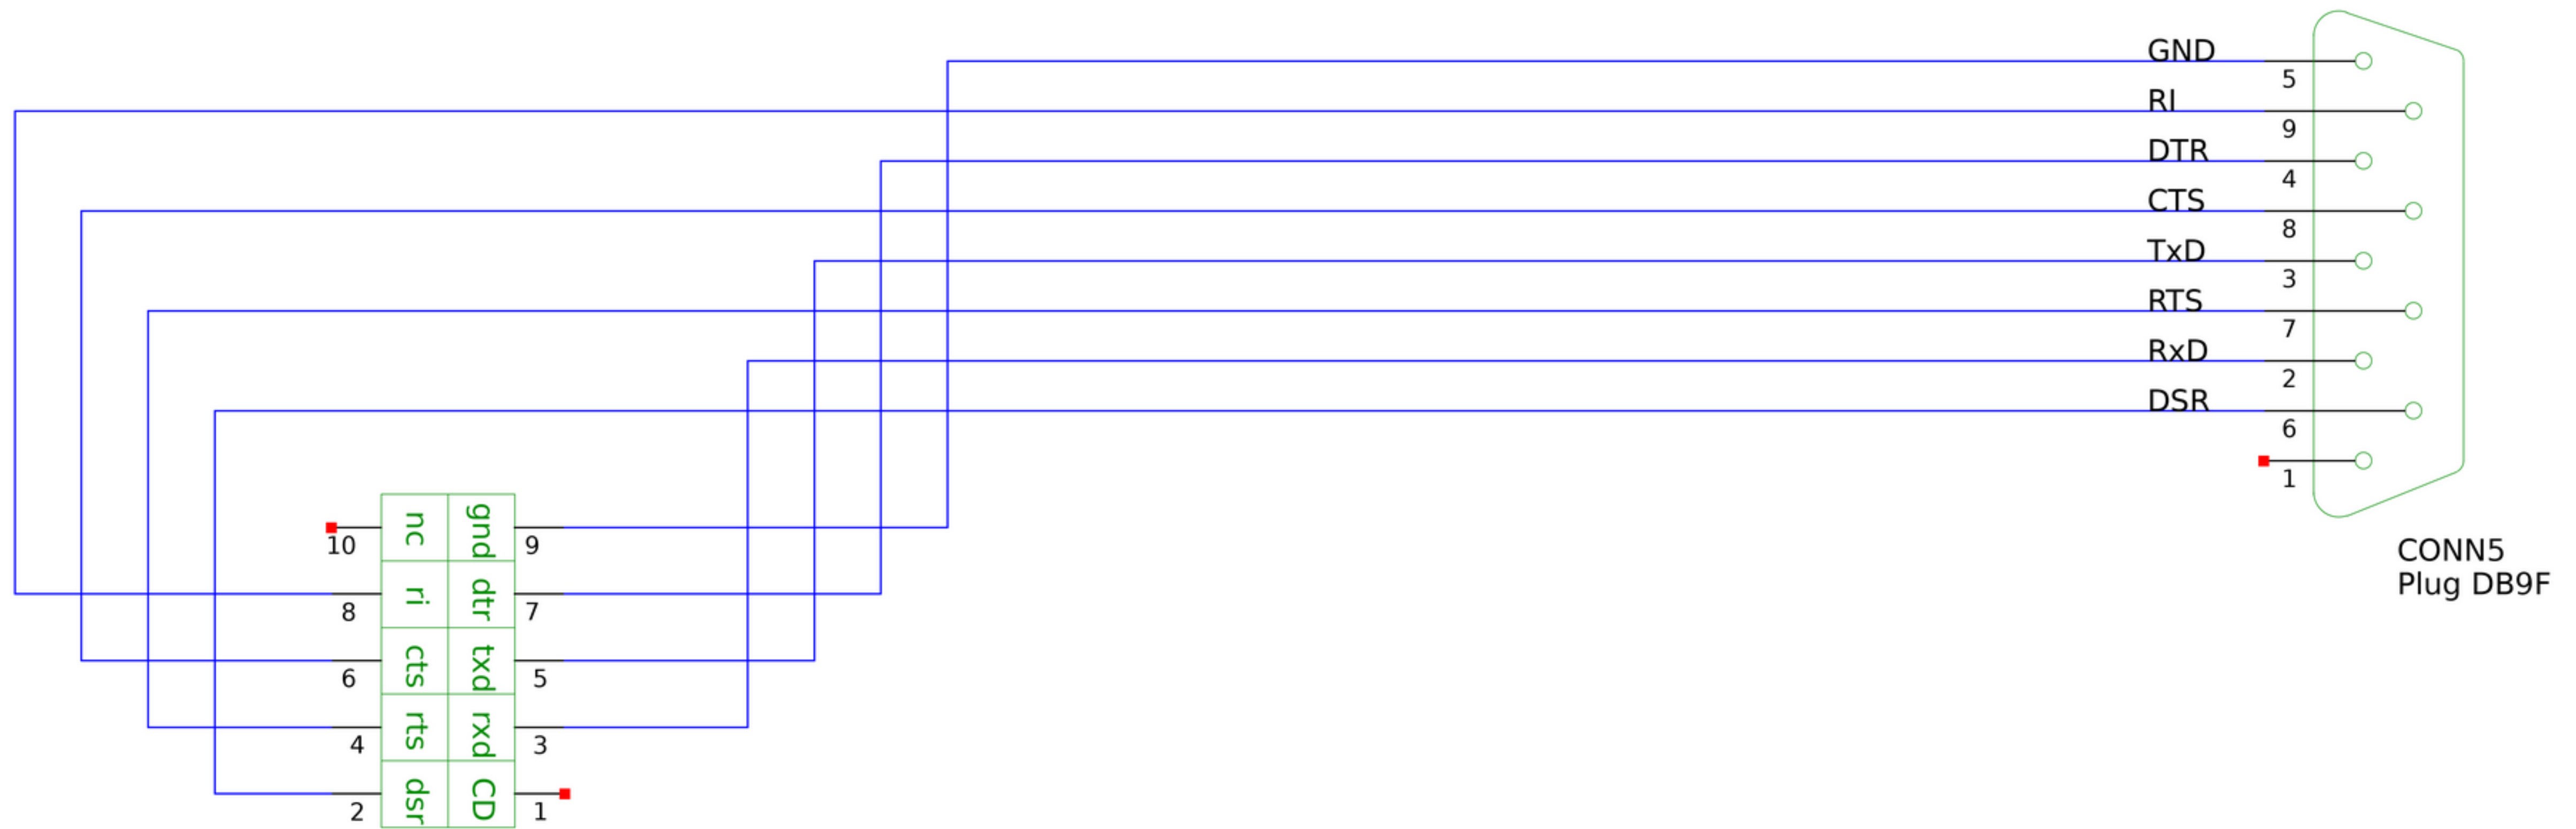

J10  
Plug for HEADER10\_2  
Header with DTE Pin Labels

Note:  
DTE = Data Terminal Equipment (Laptop)  
DCE = Data Communication Equipment (Chipflasher)

DTE pins in use:  
gnd = Signal Ground  
dtr = Data Terminal Ready (laptop is ready to send/receive, default reset line)  
rts = Request to Send (used as alternate reset line)  
txd = Transmit Data  
rxd = Receive Data